



## Econo-Coat Module Specifications

Model	Footprint			CFM	Approx. Weight (lbs.)	Motor hp (a)	High-efficiency Primary Filter		High-efficiency Final Filters
	H	W	D				26"	36"	
EC-2001	7'-3"	5'-9"	9'-2"	2000	825	3	0	2	2
EC-34M1	7'-3"	5'-9"	4'-9"	3400	775	5	6	0	3
EC-53M1	8'-3"	5'-9"	4'-9"	5300	875	10	3	3	4
EC-60M1	9'-3"	5'-9"	4'-9"	6000	875	10	0	6	4


### Configurations




EC-2001\*\*



EC-34M1



EC-53M1



EC-60M1

(a) – 460 VAC, 3-phase, 60Hz standard. Other voltages optional.

Model enclosure: Base of module with a durable powder coated finish. Filter cartridges housed in galvanized steel (stainless steel optional) with a powder coated lid.

Control panel: Starter, fuses, solid-state timer for sequential pulse cleaning, standard differential pressure gauge and safety interlock switch, Nema-12 enclosure. UL listed.


Automatic reverse air pulsing: delay setting 1.5 – 30 seconds, duration setting .05 – .5 seconds.

\*\*Only available complete with canopy.


## Econo-Coat Batch Booths

Model	Inside Work Area			Footprint			Number of Modules	Module Configuration	CFM
	H	W	D	H	W	D			
EC-2001	5'-0"	5'-0"	5'-0"	7'-3"	5'-9"	9'-9"	1	A	2000
EC-3401	7'-0"	5'-0"	5'-0"	7'-3"	5'-9"	9'-9"	1	B	3400
EC-6003	10'-0"	6'-0"	10'-0"	10'-3"	6'-3"	14'-9"	1	B	6000
EC-5301	8'-0"	7'-0"	10'-0"	8'-3"	7'-3"	14'-9"	1	B	5300
EC-6001	9'-0"	7'-0"	10'-0"	9'-3"	7'-3"	14'-9"	1	B	6000
EC-3403	8'-0"	8'-0"	10'-0"	8'-3"	17'-6"	10'-3"	2	C	6800
EC-5307	12'-0"	8'-0"	10'-0"	12'-3"	17'-6"	10'-3"	2	C	10600
EC-3402	7'-0"	9'-0"	10'-0"	7'-3"	18'-6"	10'-3"	2	C	6800
EC-5302	8'-0"	10'-0"	10'-0"	8'-3"	19'-6"	10'-3"	2	C	10600
EC-5306	10'-0"	10'-0"	10'-0"	10'-3"	19'-6"	10'-3"	2	C	10600
EC-5303	8'-0"	12'-0"	10'-0"	8'-3"	21'-6"	10'-3"	2	C	10600
EC-5305	9'-0"	12'-0"	10'-0"	9'-3"	21'-6"	10'-3"	2	C	10600
EC-6004	10'-0"	12'-0"	10'-0"	10'-3"	21'-6"	10'-3"	2	C	12000
EC-5304	8'-0"	14'-0"	10'-0"	8'-3"	15'-0"	14'-9"	2	D	10600
EC-6002	9'-0"	14'-0"	10'-0"	9'-3"	23'-6"	10'-3"	2	C	12000


### Configurations




A



B



\*C

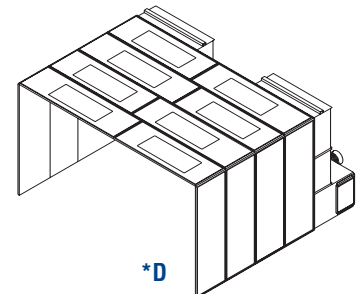


\*D

## Econo-Coat Conveyor Booths

Model	Part Size Opening	Canopy Height	Number of Manual Guns
EC-5301-C	36" x 60"	8' to 12' (in 6" increments)	1
EC-6001-C	30" x 60"	8' to 12' (in 6" increments)	2

Options: Stainless steel canopies, powder collection tray on rollers, air manifold.

Specifications: 18-gauge galvanized steel roof and wall panels and clear roof panels to allow ambient light into the booth.



EC-6001-C