



ProMix[®] 2KE

Compact, Entry Level Plural Component Proportioner



PROVEN QUALITY. LEADING TECHNOLOGY.

Simple and Flexible Proportioning

Mix Two-Component Paints Easily and Consistently

Available in pump and metered versions for all spray technologies, ProMix® 2KE makes plural component finishing EASY.

Designed for single color, two component, in-booth applications.

ELIMINATE EXPENSIVE REWORK

Spray with confidence by staying on-ratio when competitors cannot.

Stay on ratio within predefined tolerance limits, down to $\pm 1\%$ with the meter version and $\pm 2\%$ with the pump version.

Off-ratio material will not reach your product – eliminating expensive re-work.

MAKE SERVICING A SNAP

Get complete access to all items that may need periodic service.

- Easy to service cartridge style fluid valves
- Open access to all fluid components
- Externally mounted air filters
- Ability to program maintenance reminders

SAVE TIME AND MONEY

- Reduces waste
- Improves manufacturing processes
- Shortens drying times
- Reduces VOC's

KEY FEATURES

- Compact
- Flexible and easy installation
- Low flush volumes

KEY MATERIALS

- Solventborne epoxies and polyurethanes
- Waterborne epoxies and polyurethanes
- Acid catalyzed materials

KEY INDUSTRIES

- General metal
- Wood and furniture
- Farm and construction
- Truck and bus
- Aerospace
- Electronics



Pump-Based System

The ProMix 2KE Pump-Based System is designed with reliable Merkur™ pumps, is EASY to run and comes ready to spray.




AIR FILTER
Externally mounted for easy access

SIDE A
Merkur 2-ball pump

FLUID COMPONENTS
Simple to access
Stainless steel for broad material compatibility

DOSING
Standard Volumetric Dynamic Dosing

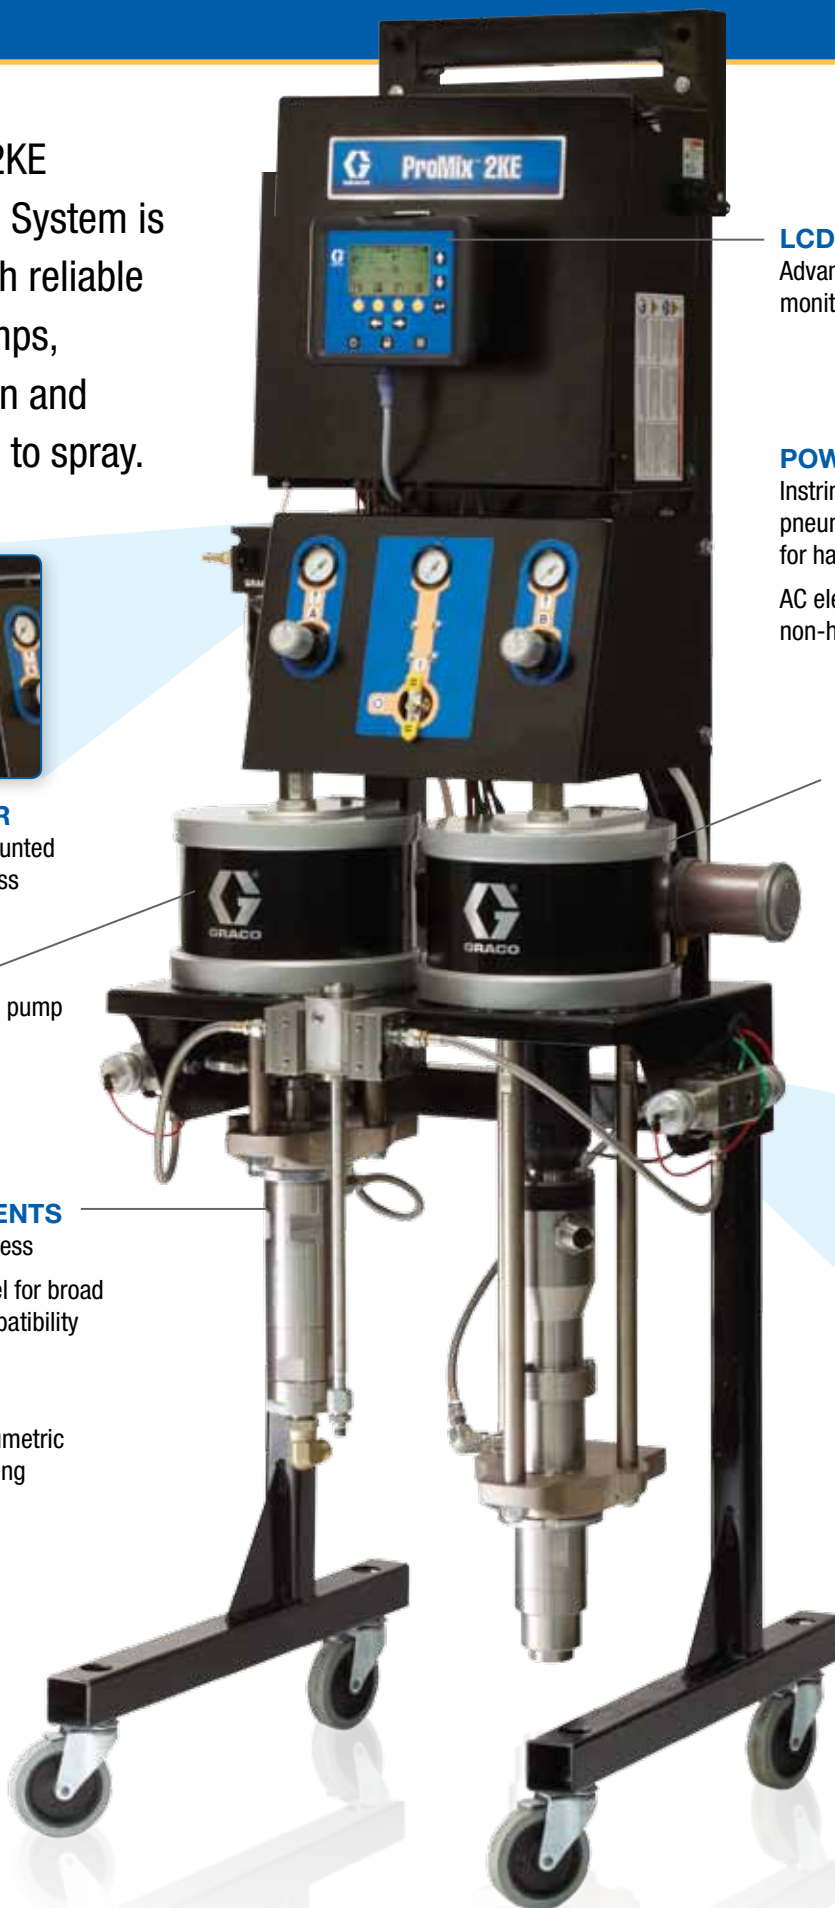

LCD DISPLAY
Advanced reporting system monitors production

POWER OPTIONS
Intrinsically safe pneumatic meter or pump for hazardous areas
AC electric for non-hazardous areas

SIDE B
Optional Merkur Bellows pump for moisture sensitive catalyst applications

MIX RATIO
Up to 30:1



FLUID VALVES
Easy to service cartridge style valves

FLUSHING
Standard A and B side

Easy-to-Use and Operate



Intuitive, icon-driven LCD display allows you to set up, operate and monitor the system as it performs.




EASY-TO-USE DISPLAY

- Mounts up to 10 feet away with standard cable
- Simple operation functions: standby, spray, purge and flushing
- Displays mix ratio, pot life time(s), and material flow rate
- Easy to change colors on meter units
- Material use screen for tracking costs and creating environmental reports
- Settable maintenance reminders: pump cycles, valve cycles and filter days

Meter-Based System

Get precise fluid volume measurements and meet target mix ratios with the ProMix 2KE flow meter system.

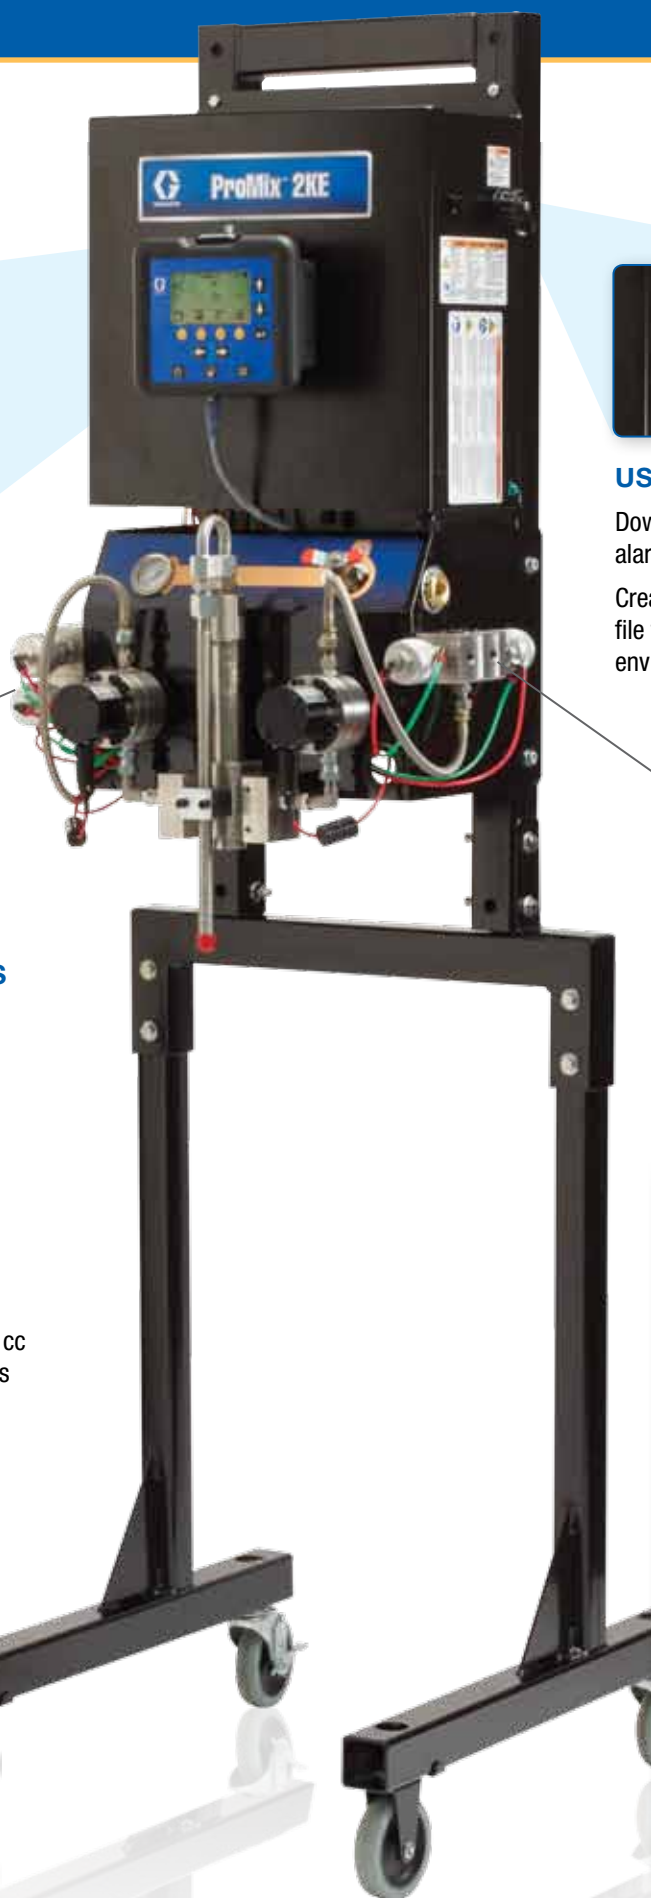

SIDE A

Dispense & flush valves

CONFIGURATIONS

Single Color/Catalyst with A&B flush

3-color/Single Catalyst with A&B flush

DOSING

Standard Sequential
50 cc Dosing

Optional Sequential 100 cc for high flow applications

Optional Dynamic for waterborne urethanes



USB KIT

Download material usage and alarms to USB memory stick

Create a sortable spreadsheet file for material tracking and environmental documentation

SIDE B

Dispense & flush valves

FLUID PRESSURE

Maximum 3000 psi
(206 bar) fluid pressure

Optional Gun Flush Box for Manual Spray Guns



Automatically flush the exact amount of solvent required, reducing waste and disposal costs

Designed to handle most waterborne and solventborne materials

Technical Specifications

Mix ratio range	
For pump system	0.1:1-30:1 (in 0.1 increments)
For meter system	0.1:1-30:1 (in 0.1 increments)
Ratio tolerance range	
For pump system	up to ±2.0%
For meter system	up to ±1%
Flow rates	
Minimum	0.02 qt/min (0.02 liter/min)*
Maximum	1 gal/min ³ (3.8 liter/min ³)
Fluid viscosity range	50-20,000 cps (heavier viscosities can be mixed with use of optional heaters, heated hoses, and hardware)
Fluid filtration	100 mesh (149 micron) recommended
Maximum fluid working pressure	
Meter-based systems	3000 psi (206 bar, 20.6 MPa)* (*Up to 4000 psi with high pressure hose kit)
Air supply pressure range	60-110 psi (4-7.5 bar, 0.4-0.75 MPa,)
Ambient temperature range	
Operating	2 to 104°F (0 to 40°C)
Storage	30 to 160°F (-1 to 71°C)
External power supply requirements	85-250 Vac, 50/60 Hz, 2 amps maximum draw 15 amp maximum circuit breaker required 8 to 14 AWG power supply wire gauge
Environmental conditions rating	indoor/outdoor
Altitude	up to 2.4 miles (4000 meters)
Maximum relative humidity	.99% up to 104°F (40°C)
Pollution degree	(1)
Installation category	(2)
Sound pressure	98 dBA at 100 psi (7 bar, 0.7 MPa)
Wetted parts	
Pumps	303, & 17-4PH grades stainless steel, zinc and nickel plating, ductile iron, tungsten carbide, PTFE,
Dispense Valves and mix manifold	303, & 17-4PH grades stainless steel, PTFE perfluoroelastomer, tungsten carbide, with nickel binder
PC Communications	USB 2.0

PUMP RATIO	3.2:1	23:1	30:1	35:1	45:1
Fluid Flow	2.0 gpm (7600 lpm)	1.6 gpm (6.0 lpm)	1.2 gpm (4.5 lpm)	1.6 gpm (6.0 lpm)	0.8 gpm (3.0 lpm)
Volume per cycle	4.3 oz (125 cc)	3.4 oz (100 cc)	2.6 oz (75 cc)	3.4 oz (100 cc)	1.7 oz (50 cc)
Max fluid outlet pressure	320 psi (2.2 MPa, 17 bar)	2300 psi (16 MPa, 158 bar)	3000 psi (21 MPa, 206 bar)	3500 psi (24 MPa, 234 bar)	4000 psi (28 MPa, 280 bar)
Air Motor Displacement	400 cc	1200 cc	1200 cc	1800 cc	1200 cc
Air Consumption	12 scfm at 1 gpm (0.34 m3/min at 3.8 lpm)	34 scfm at 1 gpm (0.96 m3/min at 3.8 lpm)	34 scfm at 1 gpm (0.96 m3/min at 3.8 lpm)	54.7 scfm at 1 gpm (1.53 m3/min at 3.8 lpm)	34 scfm at 1 gpm (0.96 m3/min at 3.8 lpm)

Ordering Information

		LOW PRESSURE OR HIGH PRESSURE		LOW PRESSURE		HIGH PRESSURE				
POWER	Reporting	Meter 1 Color	Meter 3 Color	3.2:1 Airspray	3.2:1 Airspray Bellows	23:1 Air Assist	23:1 Air Assist Bellows	30:1 Air Assist	35:1 Air Assist Bellows	48:1 Airless
Electric Non-IS	Screen	24F080	24F081	24F088	24F092	24F089	24F093	24F090	24F094	24F091
	USB	24F082	24F083	24F095	24F099	24F096	24F100	24F097	24F101	24F098
Air Powered Alternator, IS	Screen	24F084	24F085	24F102	24F106	24F103	24F107	24F104	24F108	24F105
	USB	24F086	24F087	24F109	24F113	24F110	24F114	24F111	24F115	24F112

ProMix 2KE Accessories

Meter Kits

Contains one flow meter, cable and hardware

- 15V806 1/8" Coriolis Flow Meter
- 16D329 S3000 (Solvent) Flow Meter
- 244256 High Pressure Hose Kit (4000 psi)

Dosing Kits

Contains fluid manifold hardware

- 15V021 50 cc Sequential Dosing
- 24B618 100 cc Sequential Dosing
- 15U955 0 cc Dynamic Dosing

Gun Flush Box Gun Holders

- 198787 Graco Pro Xs2
- 198405 Graco Pro Xs3, Pro Xs4
- 196768 Graco PRO 3500, 3500hc, 4500
- 15T646 Graco AirPro Air Spray
- 196769 Graco Delta Air Spray
- 196770 Graco Alpha
- 196771 Graco Alpha Plus, Alpha Plus RAC
- 15G093 Graco G15
- 15G346 Graco G40, G40 RAC

Pump Accessories

- 256410 Hopper 1.5 gal (5 l) polyethylene
- 206995 TSL
- 243340 Pail Cover with Agitator
Use to agitate material in a 5 gal (18.9 l) pail
- 222121 Fluid Regulator, Stainless Steel
Maximum working pressure: 1500 psi (103 bar, 10.3 MPa)
Regulator range: 150-1200 psi (10-28 bar, 1-8.2 MPa)
- 24A587 Pump Outlet Fluid Filter, Stainless Steel
60 mesh (250 micron), 5000 psi (350 bar, 25 MPa)
- 256425 Fluid Filter Drain Valve, Stainless Steel
5000 psi (350 bar, 35 MPa)
- 224458 224458 Replacement Filter Screen Element,
3-pack elements, 30 mesh, SST
- 224459 Replacement Filter Screen Element
3-pack elements, 60 mesh, SST
- 24A954 55 gal Drum Suction Hose and Strainer, 3/4 in fluid inlet
- 24B598 55 gal Drum Suction Hose and Strainer, 1 in fluid inlet
- 24B337 PTFE lined suction hose for cart fluid mount pump, 3/4 in inlet
- 24B338 PTFE lined suction hose for cart fluid mount pump, 1 in inlet
- 24B424 PTFE lined suction hose for wall fluid mount pump, 3/4 in inlet
- 24B425 PTFE lined suction hose for wall fluid mount pump, 1 in inlet

Miscellaneous Kits

- 24F301 Pump Stand Kit
- 24G611 Meter Stand Kit
- 16F358 USB Kit
- 16G351 Electric Power Kit
- 16G353 Alternator Power Kit
- 280573 Ratio Check Kit
- 24F403 2 Color Expansion Kit
- 123280 50 ft CAN Cable - IS
- 15U533 50 ft CAN Cable - non IS
- 15D909 5 Micron Air Filter Replacement
- 15D890 40 Micron Air Filter Replacement
- 248433 5 and 40 Micron Filter Kit
(Pump Sys) High Pressure Hose Kit
- 15W034 Alarm Light
- 15V826 Gun Flush Box Kit
- 15T632 Airflow Switch Kit

Solvent Pumps

- 233488 Triton Pump
- G15W09 Merkur pump, 15:1

RETURN-ON-INVESTMENT (ROI)

Example

See how much you can save annually by converting from hand mixing or conventional mechanical proportioning methods to Graco's ProMix 2KE.

Compare and Save!

With a user-friendly controller and advanced potlife controls, ProMix 2KE proportioning system offers substantial cost and material savings.

If you're currently hand mixing or using a mechanical proportioner, you may be spending more than you should on wasted material, extra labor and off-ratio re-work costs. The Graco ProMix 2KE reduces these expenses and provides a quick ROI.

ROI Information	Current Method	ProMix 2KE	Your Estimate
Material Cost per Gallon			
Price per gallon/liter	\$100	\$100	A
Price per gallon/liter of flushing solvent	\$10	\$10	B
Number of days per year	250	250	C
Labor rate per hour	\$30	\$30	D
Material Usage			
Number of batches/color changes per day	3	1	E
Unused paint per batch	0.5 gal	0.05 gal	F
Solvent used per batch	1.0 gal	0.25 gal	G
Preparation and cleanup time per batch	0.5 hr	0.05 hr	H
Analysis			
Total annual cost of wasted paint (A x F x C x E)	\$37,500	\$1,250	I
Total annual cost of wasted solvent (B x G x C x E)	\$7,500	\$625	J
Total annual labor cost (H x E x C x D)	\$11,250	\$375	K
Total Cost (I + J + K)	\$56,250	\$2,250	
Payback			
Average cost of ProMix 2KE		\$15,000	L
Total Annual ProMix 2KE Savings		\$56,250 - \$2,250 = \$54,750	M
Payback [(L/M) x 12 months]		3.3 months	



ABOUT GRACO

PROVEN QUALITY. LEADING TECHNOLOGY.

Founded in 1926, Graco is a world leader in fluid handling systems and components. Graco products move, measure, control, dispense and apply a wide range of fluids and viscous materials used in vehicle lubrication, commercial and industrial settings.

The company's success is based on its unwavering commitment to technical excellence, world-class manufacturing and unparalleled customer service. Working closely with qualified distributors, Graco offers systems, products and technology that set the quality standard in a wide range of fluid handling solutions. Graco provides equipment for spray finishing, protective coating, paint circulation, lubrication, and dispensing sealants and adhesives, along with power application equipment for the contractor industry. Graco's ongoing investment in fluid management and control will continue to provide innovative solutions to a diverse global market.

GRACO LOCATIONS

MAILING ADDRESS

P.O. Box 1441
Minneapolis, MN 55440-1441
Tel: 612-623-6000
Fax: 612-623-6777

AMERICAS

MINNESOTA

Worldwide Headquarters
Graco Inc.
88-11th Avenue N.E.
Minneapolis, MN 55413

EUROPE

BELGIUM

European Headquarters
Graco N.V.
Industrieterrein-Oude Bunders
Slakweidestraat 31
3630 Maasmechelen,
Belgium
Tel: 32 89 770 700
Fax: 32 89 770 777

ASIA PACIFIC

AUSTRALIA

Graco Australia Pty Ltd.
Suite 17, 2 Enterprise Drive
Bundoora, Victoria 3083
Australia
Tel: 61 3 9467 8558
Fax: 61 3 9467 8559

CHINA

Graco Hong Kong Ltd.
Shanghai Representative Office
Room 118 1st Floor
No.2 Xin Yuan Building
No.509 Cao Bao Road
Shanghai, 200233
The People's Republic of China
Tel: 86 21 649 50088
Fax: 86 21 649 50077

INDIA

Graco Hong Kong Ltd.
India Liaison Office
Room 432, Augusta Point
Regus Business Centre 53
Golf Course Road
Gurgaon, Haryana
India 122001
Tel: 91 124 435 4208
Fax: 91 124 435 4001

JAPAN

Graco K.K.
1-27-12 Hayabuchi
Tsuzuki-ku
Yokohama City, Japan 2240025
Tel: 81 45 593 7300
Fax: 81 45 593 7301

KOREA

Graco Korea Inc.
Shinhan Bank Building
4th Floor #1599
Gwanyang-Dong, Dongan-Ku,
Anyang-si, Korea 431-060
Tel: 82 31 476 9400
Fax: 82 31 476 9801

SALES/ DISTRIBUTION/ SERVICE

Call today for product information or to request a demonstration.

877-84GRACO (1-877-844-7226) or visit us at www.graco.com.

Graco Inc. is registered to I.S. EN ISO 9001

North America
Customer Service
800-328-0211
Fax 877-340-6427