

GH™ Roof Rigs

Gas Hydraulic Sprayers

2

Features and Benefits

- Exclusive Quick Change Pump Lower maximize production. Easily customize your Roof Rig for each coating, without purchasing additional rigs
- Oversized 2 in. x 6 ft. (50.8 mm x 1.8 m), 55-gal. (200 L) suction hose and tube allow siphoning of heavy coatings directly from the drum to increase spray time and reduce changeover
- Quick disconnects make clean-up easy
- Higher pressure Roof Rigs allow the use of smaller diameter hose or longer hose lengths for maximum efficiency and coverage


Typical Applications

- Roofing

Typical Coatings Applied

- Primers
- Acrylics
- Emulsions
- Elastomerics
- Mastics
- Contact Cement

*Heavy-duty construction
to withstand the
harshest environments*

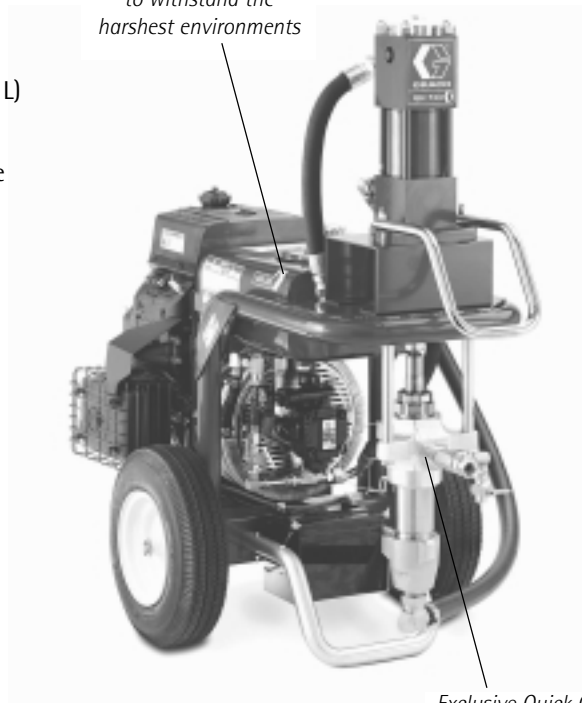

*Exclusive Quick Change
pump lower*

**GH733 Roof Rig
231733**

GH Roof Rigs

Gas Hydraulic Sprayers

Technical Specifications

	GH733	GH1015 Roof Rig	GH2075 Roof Rig	GH2560 Roof Rig	GH3640 Roof Rig	GH5030 Roof Rig
Maximum working pressure (MPa, bar)	3500 psi (36.9, 369)	1000 psi (0.7, 7)	1800 psi (12.4, 124)	2400 psi (16.6, 166)	3600 psi (24.5, 245)	4900 psi (33.7, 337)
Fluid flow (gpm, lpm)	3.0 (11.4)	15 (56.7)	7.5 (28.4)	6 (22.7)	3.8 (14.4)	2.8 (10.5)

2

Ordering Information

SPRAYERS

231733	GH733
965165	GH1015 Roof Rig
965171	GH2075 Roof Rig
965168	GH2560 Roof Rig
687327	GH3640 Roof Rig
687100	GH5030 Roof Rig

QUICK-CHANGE PUMP LOWERS

948728	GH1015 Pump Lower
948734	GH2075 Pump Lower
948731	GH2560 Pump Lower
687329	GH3640 Xtreme Pump Lower
570183	GH5030 Xtreme Pump Lower

Accessories

224472	Mastic Roofing Gun Rated to 4050 psi (27.5 MPa, 275 bar) with 36 in. (914 mm) extension.
236995	High Pressure Elastomeric Hand Gun Rated to 7400 psi (50.3 MPa, 503 bar).
224470	Spray Roller Rated to 4000 psi (27.6 MPa, 276 bar), standard with 18 in. (45 cm) roller cover & two 861 HD RAC Tips. Attach to 224472 Gun (tip selection will vary with material sprayed)
High Pressure Hose	
214705	3/8 in. x 50 ft. (10 mm x 15.2 m) long, 3/8(mbe), 3000 psi (20.7 MPa, 207 bar)
215227	1/2 in. x 50 ft. (12 mm x 15.2 m) long, 1/2(mbe), 4050 psi (27.5 MPa, 275 bar)
215245	3/8 in. x 50 ft. (10 mm x 15.2 m) long, 3/8(mbe), 5000 psi (34.5 MPa, 345 bar)
Low Pressure Hose	
224440	3/4 in. x 50 ft. (9 mm x 15.2 m) long, 3/4(m) x 3/4(f), 2250 psi (15.5 MPa, 155 bar)
224439	5/8 in. x 40 ft. (15.9 mm x 12.2 m) long, 3/4(m) x 1/2(m), 2750 psi (18.7 MPa, 187 bar)
Fittings	
156849	3/8(mbe) Nipple for 3/8 in. (10 mm) hose.
155865	1/2(fbe) Coupler for 1/2 in. (12 mm) hose.
Kits	
948727	2 in. (50.8 mm) Siphon Kit adapts to any GH733, Bulldog or King Pump – air or gas
Lift Kits	
Changes Standard GH733 to a Quick Change Roof Rig.	
948740	For modifying a GH733 to a Quick-Change Roof Rig.
245244	For modifying a GH733 with version code A, B or C to accept GH 1015, GH2075, or GH2560 pump lowers.